




PIN ASSIGNMENT	
PIN	SIGNAL
1	DC RTN
2	GND
3	TX-
4	TX+
5	RX-
6	RX+
7	DC PWR
8	SYNC

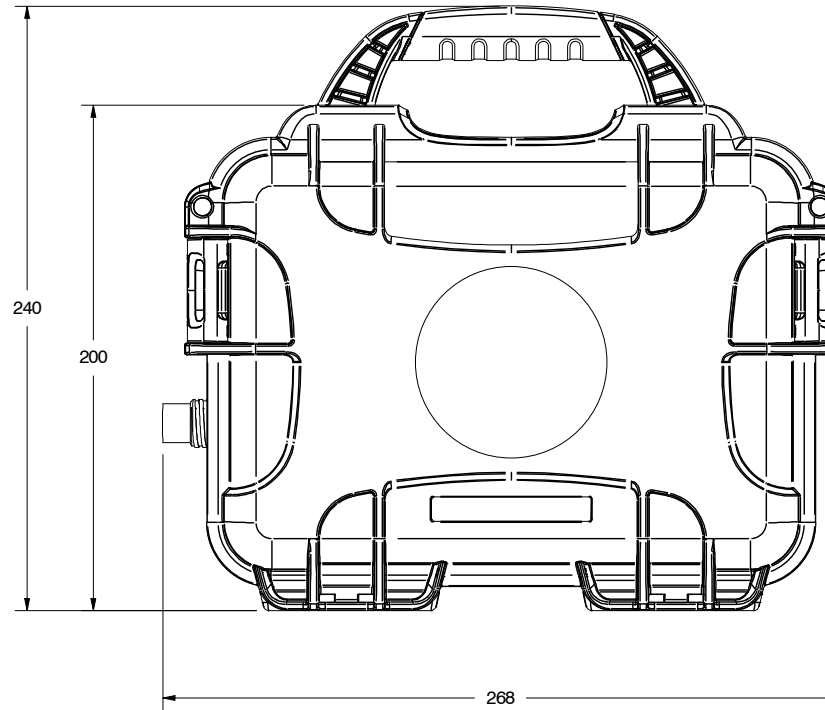

FEMALE SOCKETS  
FACE VIEW

BATTERY DATA	
BATTERY TYPE	LI-ION(18650)
CAPACITY (Wh)	100
OUTPUT VOLTAGE (V)	18.0 - 25.2
RATED CURRENT (A)	1.5 MAX
CHARGING CURRENT (A)	1.0 MAX
CHARGING VOLTAGE (V)	25.5

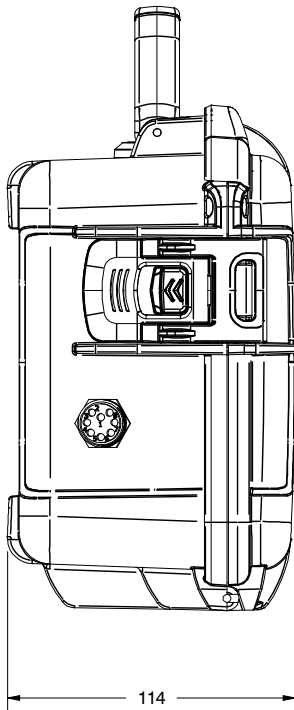

**NOTES:**

1. CONNECTOR: SUBCONN MCBH-8F
2. MATERIAL, CASE: COPO PP
3. IP RATING: 67
4. BUOYANCY: 2.4 kg (5.2 lb)

THE INFORMATION CONTAINED IN THIS DOCUMENT IS CONFIDENTIAL AND SHALL NOT BE MADE PUBLIC, OR COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS UNLESS SPECIFICALLY AUTHORIZED IN WRITING BY OCEAN SONICS LIMITED. THIS DOCUMENT IS THE PROPERTY OF OCEAN SONICS LIMITED AND IS SUBJECT TO RETURN ON DEMAND. ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

COPYRIGHT © 2020 OCEAN SONICS LTD.

UNLESS OTHERWISE NOTED:

1. DIMS IN MILLIMETRES
2. X ± 0.75
3. XX ± 0.25
4. XXX ± 0.075
5. ANGLES ± 1/2°
6. ECCENTRICITY 0.075 MAX
7. FLATNESS 0.075 T.I.R.
8. SURFACE FINISH: 125



Ocean Sonics Limited  
NOVA SCOTIA, CANADA  
WWW.OCEANSONICS.COM

TITLE		LAUNCH BOX		
SIZE	DRAWING NUMBER	REV	SCALE	SHEET
A	PUB-BL-B4-X	A	1:1	1 OF 1

